

版本 REV	區域 ZONE	標記 LTR	變更內容 DESCRIPTION	日期 DATE	變更者 REVISER	審核 APPD
1.0			NEW DESIGN	03/30.09		
1.1	C2/C4	△	增加六角螺絲	04/04.09		
1.2	C2/C4	△	鉚釘加長1mm	06/09.09		


NOTES:

- MATERIAL:
CONTACT:PHOSPHOR BRONZE OR BRASS
SHELL-STEEL,NICKEL PLATED
HOUSING: PBT+30%GF
- ENVIRONMENTAL:TEMPERATURE RANGE -20°C TO +85°C
- ELECTRICAL:
RATED:1.5A @ 40V AC(ms)
CONTACT RESISTANCE:20 MILLIOHMS MAXIMUM
INSULATION RESISTANCE: 1G OHMS MINIMUM
DIELECTRIC WITHSTANDING VOLTAGE:500V AC(ms)
- MECHANICAL:
MATING FORCE: 10 LB.(4.5KG) MAXIMUM
UNMATING FORCE:2.2LB.(1Kg) MINIMUM
8.8LB.(4Kg) MAXIMUM
- WITH "▼" MARK DIMENSIONS ARE IMPORTANT AND SHOULD BE CONTROLLED BY QC.

ORDERING INFORMATION

3 J V 29 S - * * D - AI*
(1) (2) (3) (4) (5) (6) (7) (8)

- SERIES
3J:Digital Visual Interface CONNECTOR
- CONSTRUCTION TYPE:
S:SOLDER TYPE
L:RIGHT ANGLE P.C.B TYPE
V:VERTICAL TYPE CONN.
- NO OF CONTACTS:
EX.29:24+5 POSITIONS
- CONTACT TYPE:
P:PLUG S:SOCKET
- COLOR (HOUSING)
3:BLACK 4:WHITE
- CONTACT FINISH:
0:SELECTIVE GOLD FLASH OVER 30u" NICKEL
2:15u" SELECTIVE GOLD OVER 50u" NICKEL
7:3u" SELECTIVE GOLD OVER 50u" NICKEL
C:5u" SELECTIVE GOLD OVER 50u" NICKEL
- ENTRY HOLE SIZE:
0:W/O METAL CAN
3:W/4-40# 6.0*11.8mm SCREW
4:W/4-40# 4.75*11.8mm SCREW
D:W/4-40# 5.00*13.00mm SCREW
鑽六角螺絲5.8X9.5
- SUFFIX NO:
AE: DIP H=2.8mm
AG: DIP H=2.3mm
AI: DIP H=7.05mm

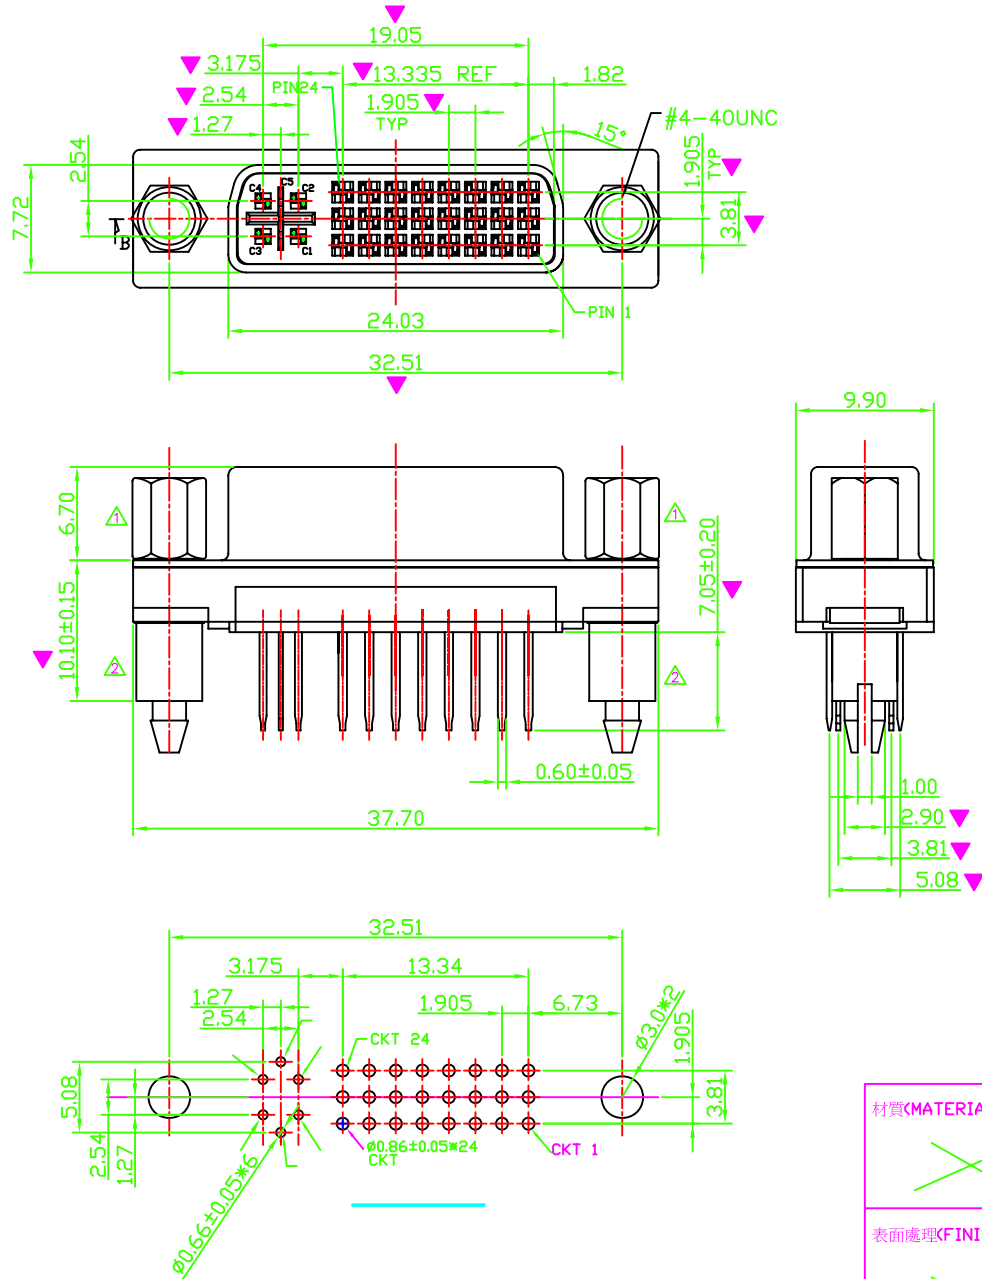

RoHS Compliant

材質(MATERIAL)	一般公差 (GENERAL TOLERANCE) X.XXX ± 0.05 X.XX ± 0.10 X.X ± 0.15 X. ± 0.20 ANGLE ± 1°		產品名稱(PART NAME)	
表面處理(FINISH)	繪圖(DRAWN) Andy 09/30.03 設計(DESIGNER) Younger 09/30.03 審查(CHECKED)		DVI 24+5 FEMALE CONN (鉚釘魚叉型DIP7.05)	比例(SCALE) 1:1 單位(UNIT) mm
核淮(APPROVED)		產品料號(PART NO.) DVI-STRF-C001	真碼(SHEET) 1/1	版本(REV) 1.2