
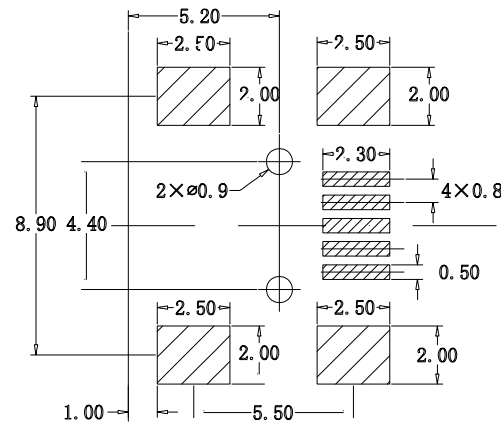
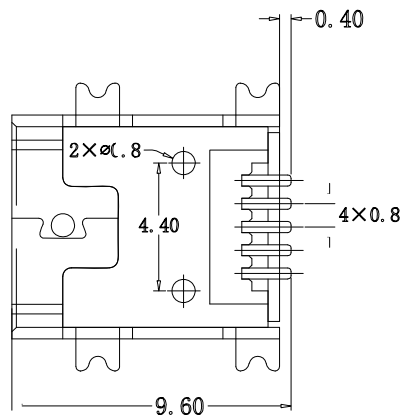
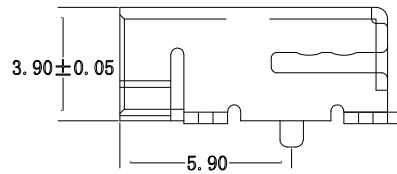



文件类型 内部发行文件

MARK	DATE	ECN /O.	DESCRIPTION	REV.	DESIGN

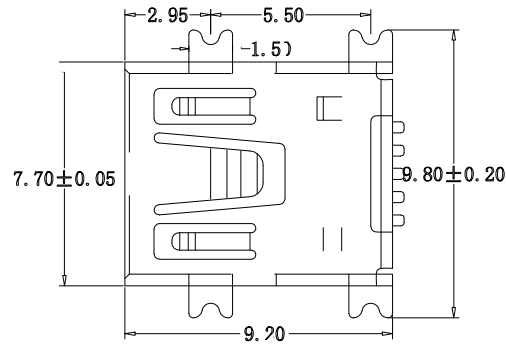

RFCCMMENDFD PCB LAYC JT

规格说明: Specifications:

电气特性: Electrical:

- 额定电流: Current Rating  
1.0A/contact terminal
- 额定电压: Voltage Rating  
30V DC
- 接触阻抗: Contact Resistance  
50 milliohms MAX
- 耐电压: Dielectric Withstanding Voltage:  
300 V AC AT Sea Level
- 绝缘阻抗: Insulation Resistance:  
100MEGA ohms MIN

物理性能: Mechanical:


- 插拔力: Connector Mate and Unmate Force  
Mate force: 3.0kgf (MAX)  
Unmate force: 0.7kgf (MIN)
- 端子保持力: Terminal Retention  
0.5kgf (MIN)

原材料: Material:

- 塑胶: Housing:  
High Temperature Thermoplastics,  
UL 94V-0 LCP Black
- 端子: Contact: Copper Alloy C2680/C519
- 外壳: Shell: Copper Alloy C2680

电镀: Finish:

- 端子: Contact: Plated Gold in Mating Area;  
Tin on Solder Tails
- 外壳: Shell:  
Nickel Plating



BossConn

TOLERANCES	X.X ±0.30	X.XX ±0.20	X.XXX ±0.10		
ANGLES	X.X ±0.3°	X./X ±0.2°	X.XXX ±0.1°		
DRAW NO.		DATE		NAME	MINI USB 5P/F SMT加长 (AB型, 1.0柱)
DESIGN				PART NO.	MUSB-ABF-CN02
VERIFIED				UNITS	MM
APPROVED				SCALE	1:
				PAGE	