
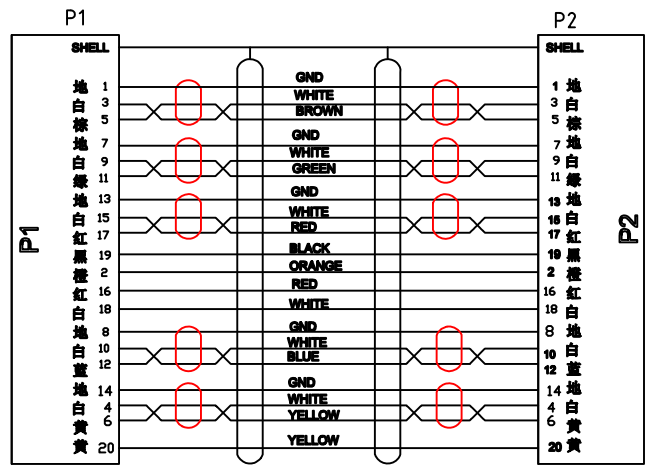



RoHS Compliant

BCN NO	REV	DESCRIPTION	DATE	REVISER	APPD
N/A	A	Initial Issue	Feb 08, 2017		Andy

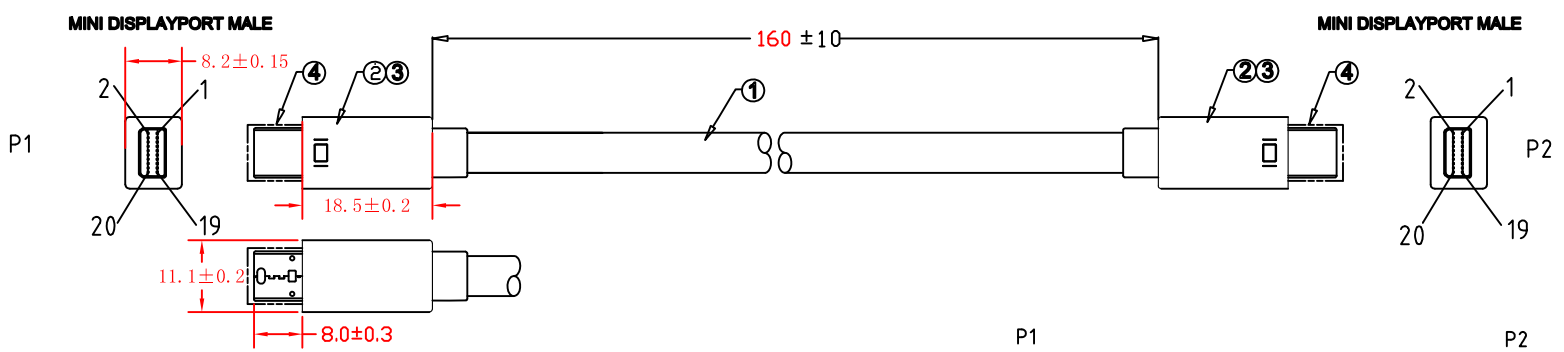

- Note:**
1. POWER CAN MEET 3.5WATTS AT LEAST
 2. WIRING DIAGRAM IS END TO END, DETAILED AS RIGHT DIAGRAM
 3. 接线表要按照右边的接线表， 一对一接点， 注意对线。 芯线颜色可以调整
 4. 外模厚度要越薄越小， 不可更换模具
 5. 成品是黑色

4	Dust Cap	TRANSPARENT	2 PCS
3	Overmold	Molding Type, PVC, Color: Black	1 Set
	Premold	LDPE	1 Set
2	Conn	Mini Displayport CONNECTOR, MALE	2 SET
1	Cable	UL20276 32AWG*5C (EAM+D)+32AWG*5C A+B .Black, L=160mm Or Equivalent.	1 Pcs
ITEM	NAME	DESCRIPTION	QTY

TOLERANCE UNSPECIFIED		BossConn	
±		SCALE	UNIT
± 0.1		NON	mm
± 0.38	ANGLE	NAME	
±		Mini Displayport Male to Male Cable	
±	DRAWN: Andy 2/8, 17	DRAWING NO.	SHEET
±	DESIGNER:	BSC-MDP-MM-CBL-02	1/1
±	CHECKED:	REV	A
±	APPROVED:		