

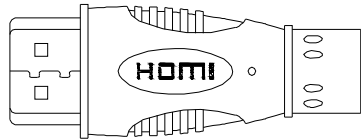


REV	DESCRIPTION	DATE
△		
△		

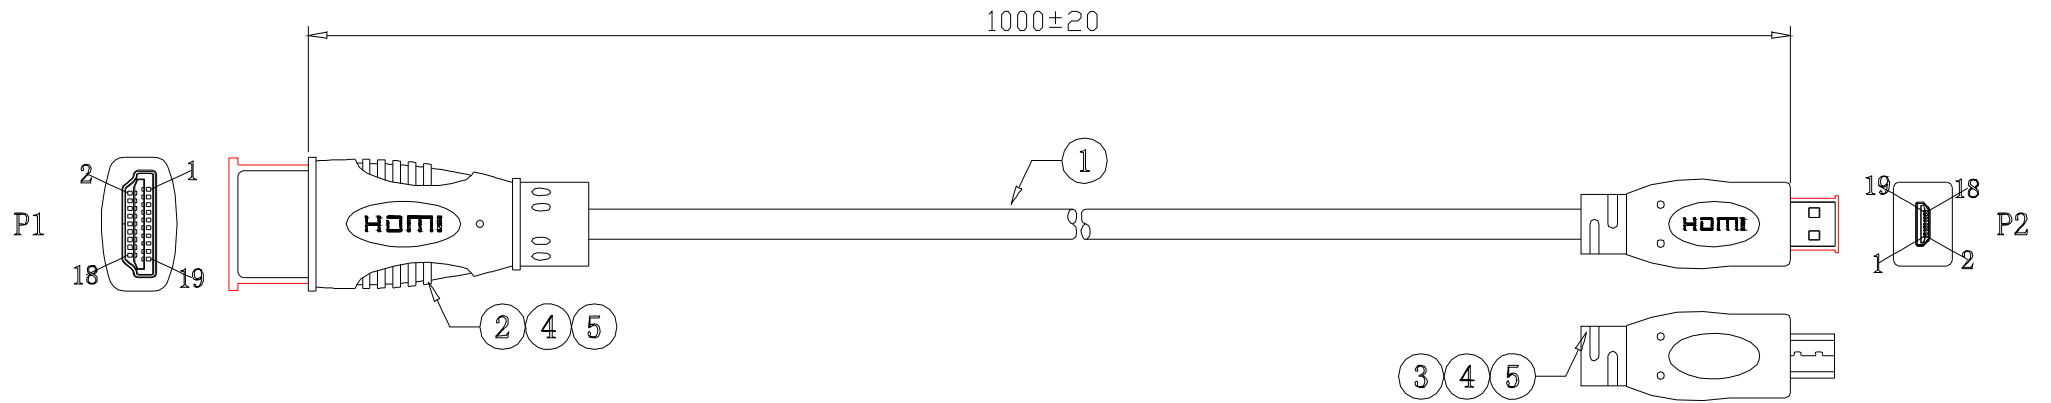

接点表

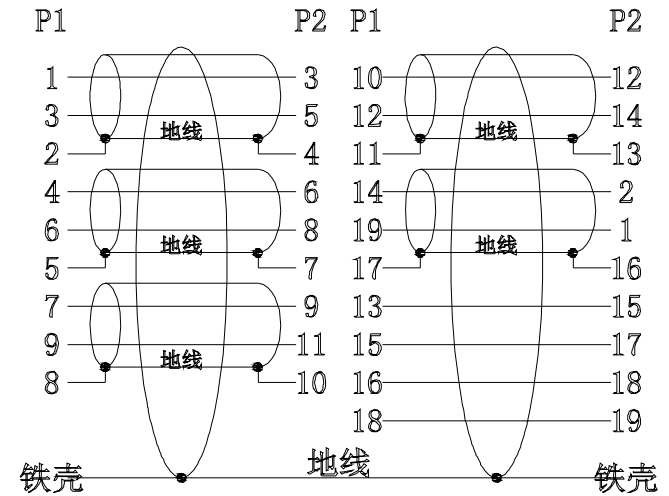

测试条件:

1. 100% 短路&断路&错位测试.
2. 绝缘阻抗:10M ohm(MIN)
3. 导通阻抗:5 ohm(MAX).
4. 耐压测试:DC 300V/10ms



BossConn

NO	ITEM	DESCRIPTION	Q'TY	UNIT
4	C020-00001	45P 黑色 PVC料	15	g
3	C01S-00001	PE料	10	g
2	B04T-00008	HDMI D型MICRO-19M 公头 黑胶芯 PIN镀GF 铁壳镀金 短型一体式	1	pcs
2	B04T-00002	HDMI-19M 公头 黑胶芯 PIN镀GF 铁壳镀金	1	pcs
1	A050-00066	UL20276 (1P*32AWG+DAM)*5C+4C*32AWG+ADB(镀锡铜编) OD:4.0MM 黑色1.4版正标	1	M

.X		.015		.30		DESCRIPTION: HDMI AM TO MICRO HDMI 1.4版正标 L=1M	
.XX		.010		.10			
.XXX		.005		.05			
DRAWN BY						荣青	CUSTOMER :
CHECK BY							CUSTOMER P/N:
APPD BY							SCALE NONE
							DRAWING NO:
							UNIT MM
							DATE 2013.08.13
							BSC-HDD-AD-001
							REV A
							1/1