RoHS Compliant

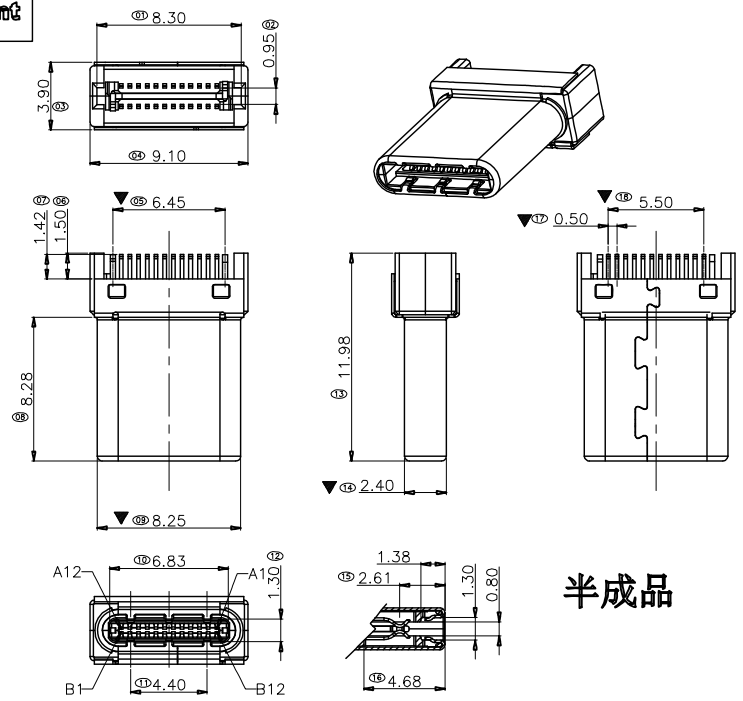

半成品

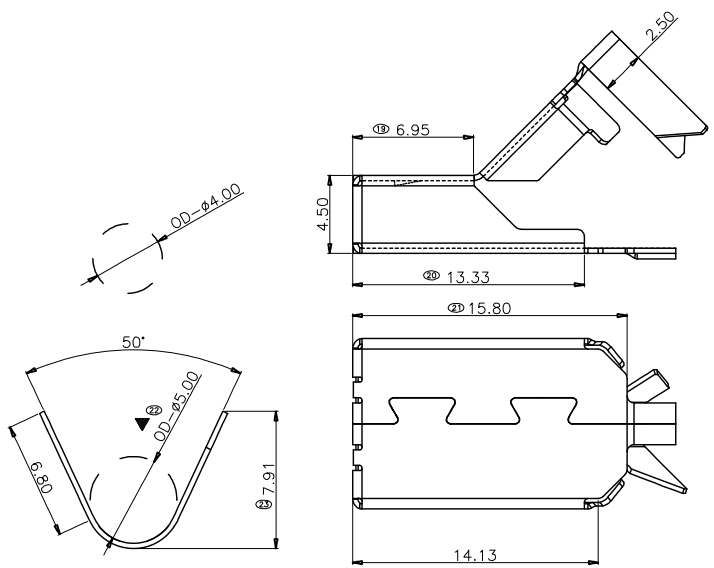

后壳

A12	A11	A10	A9	A8	A7	A6	A5	A4	A3	A2	A1
GND	RX2+	RX2−	Vbus	SBU1	D−	D+	CC	Vbus	TX1−	TX1+	GND
GND	TX2+	TX2−	Vbus	Vconn			SBU2	Vbus	RX1−	RX1+	GND
B1	B2	B3	B4	B5	B6	B7	B8	B9	B10	B11	B12

PART NO

1 X 8 0 − X 1 X

2 3 4 5 6 7

2 MALE
1:MALE

3 HOUSING COLOR
5:BLACK 2:WHITE 9:BLUE

4 FLOW NO.: 80

5 端子电镀
1:GOLD FLASH 2:3u"GOLD
3:5u"GOLD 4:10u"GOLD
5:15u"GOLD 6:30u"GOLD

6 1:RoHS Compliant

7 包装方式
1:TRAY PACKAGE
3:PE BAG PACKAGE

SPECIFICATIONS:

1. MECHANICAL :
   1.1 INSERTION FORCE :5N~20N
   1.2 WITHDRAWAL FORCE :8N~20N
   AFTER 10,000 CYCLES MATING: 2N MIN.
2. ELECTRICAL :
   2.1 CONTACT CURRENT RATING: 3A .
   2.2 VOLTAGE RATING :30V AC (rms)
   2.3 WITHSTANDING VOLTAGE: 100 VAC FOR 1 MINUTE
   INSULATION RESISTANCE: 100 MEGAOHMS MIN.
   2.4 CONTACT RESISTANCE: 40 MILLIOHMS MAX.
3. ENVIRONMENTAL :
   3.1 OPERATING TEMPERATURE:−25°C TO +85°C



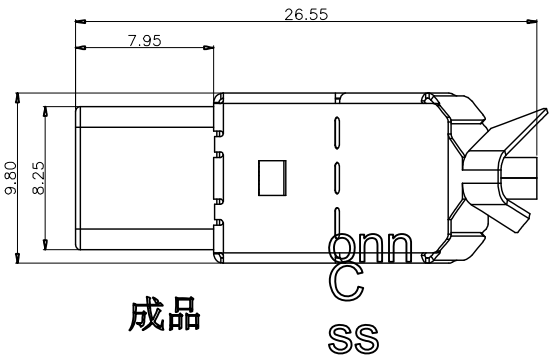

成品

ECN. NO	REV	DATE	DESCRIPTION	CHANGED	APPROVED
——	A	14.11.18	NEW RELEASE		

▼ = Places
DIM NO. XX
SCALE: FIT
SHEET: 1 OF 1
UNIT: mm

TOLERANCES UNLESS	
X. ± 0.50	X° ± 3°
.X ± 0.38	.X° ± 2°
.XX ± 0.25	.XX° ± 1°
.XXX ± 0.13	.XXX° ± 0.5°

Bo

DESIGN: Y.B DATE: 2014.11.18
CHECKED: DATE:
APPROVED: DATE:

USB C TYPE PLUG三件式
PART NO: USB3.1-CM-CN02
SIZE: A4
DWG NO:
REV: A