


RoHS Compliant

CUSTOMER DRAWING


A

A




B

B

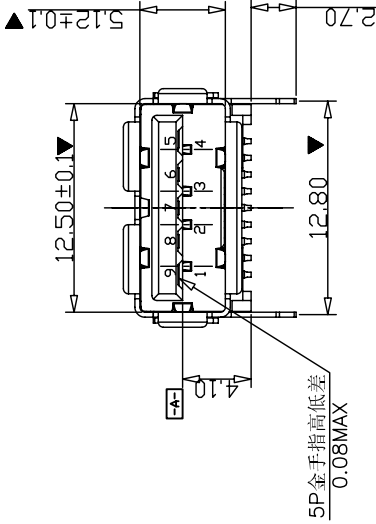

C

C

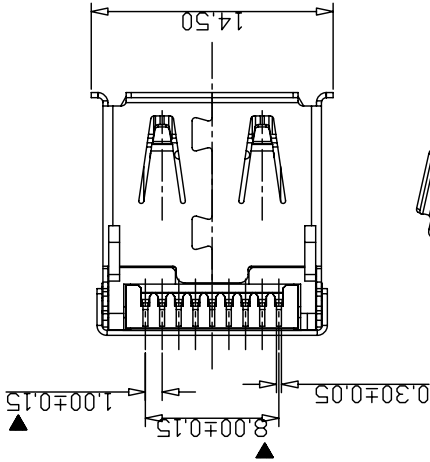

D

D

SHELL & PLATING CODE
0: COPPER/NICKEL PLATING
1: SPCC/NICKEL PLATING

PACKAGING CODE
1: TRAY PACKAGING
2: TAPE REEL PACKAGING
3: PE BAG PACKAGING
4: TUBE PACKAGING


RECOMMENDED PCB LAYOUT

RESIN& COLOR CODE
0: LCP,BLUE COLOR
1: LCP,BLACK COLOR
2: LCP,RED COLOR

TERMINAL CONTACT PLATING CODE:
1: GOLD FLASH
2: 3u" GOLD
3: 5u" GOLD
4: 10 u" GOLD
5: 15u" GOLD
6: 30u" GOLD

E

E



F

F

—	B	07.04.11'	增加后塞	DOREN	
—	A	09.02.25	RELEASE	Jesse	
ECN. NO	REV	DATE	DESCRIPTION	CHANGED	APPROVED

▼ = Places		TOLERANCES UNLESS		BossConn	
DIM NO.	Plates	.X ± 0.30	.X° ± 3°	REG:	USB3.0 FEMALE SLIM SMT TYPE
SCALE: 1:1		.X ± 0.20	.X° ± 2°	DATE:	ASS'Y (板叉脚, 14, 45mm)
SHEET: 1 OF 1		.XX ± 0.15	.XX° ± 1°	DATE:	USB3-AF-SMT-0002
UNIT: mm		.XXX ± 0.05	.XXX ± 0.5°	DATE:	REV: A4
				DATE:	REV: B

Pin SIGNAL
NUMBER NAME

1	VBUS
2	D-
3	D+
4	GND
5	StdA_SSRX-
6	StdA_SSRX+
7	GND_DRAIN
8	StdA_SSTX-
9	StdA_SSTX+
ShellShield	