

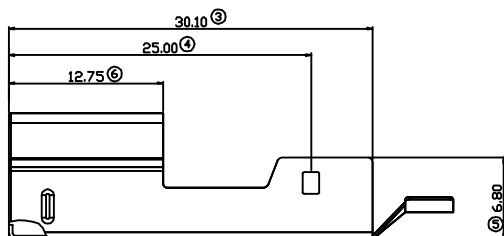
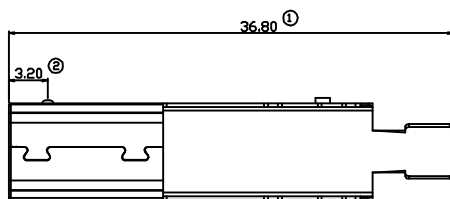



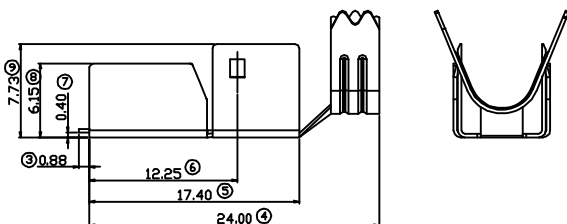


RoHS Compliant

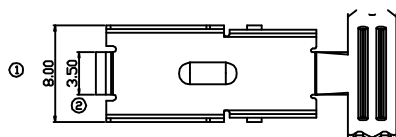

NOTE:

1. MATERIAL:

- 1. HOUSING: PBT+3%GF UL 94V-0
- 2. CONTACT: 4P: C2680 (T=0.20mm)
5P: C5 9 (T=0.20mm)
- 3. Shell: SPCC T=0.3MM

2. PLATING

2.1. TERMINAL:

- 50u" MIN NICKEL ALL OVER
- 80u" MIN Tin ON SOLDER AREA
- (~30)u" Au ON CONTACT AREA

2.2 Shell: 80u" Min NICKEL ALL OVER

3. Mechanical Characteristics:


- Mating Force: 3.57kg Max
- Unmating Force: .02kg Min

4. Environmental:

- Operating Temperature: -40° C - +85° C

5. PART NO:

ECN. NO	A	09.05.16	RELEASE	JESSE	
REV			DESCRIPTION	CHANGED	APPROVED

IMPORTANT DIM		TOLERANCES UNLESS			BossConn	
DIM NO.	SCALE: 1:1	X. ± 0.2	X" ± 3'			
		.X ± 0.1	.X" ± 2'			
		.XX ± 0.05	.XX" ± 1'			
SHEET: 1 OF 1		.XXX ± 0.03	.XXX' ± 0.5'			
UNIT: mm						

DESIGN	DATE:	USB3.0 B MALE (三件式) 插线式	
Jesse Zhou	2009.05.16		
CHECKED:	DATE:		
APPROVED:	DATE:		

PART NO:	SIZE:
USB3-BM-CD01	A4
DWG NO:	REV:
	A