


RoHS Compliant

ECN NO	REV	DESCRIPTION	DATE	REVISOR	APPD
--------	-----	-------------	------	---------	------

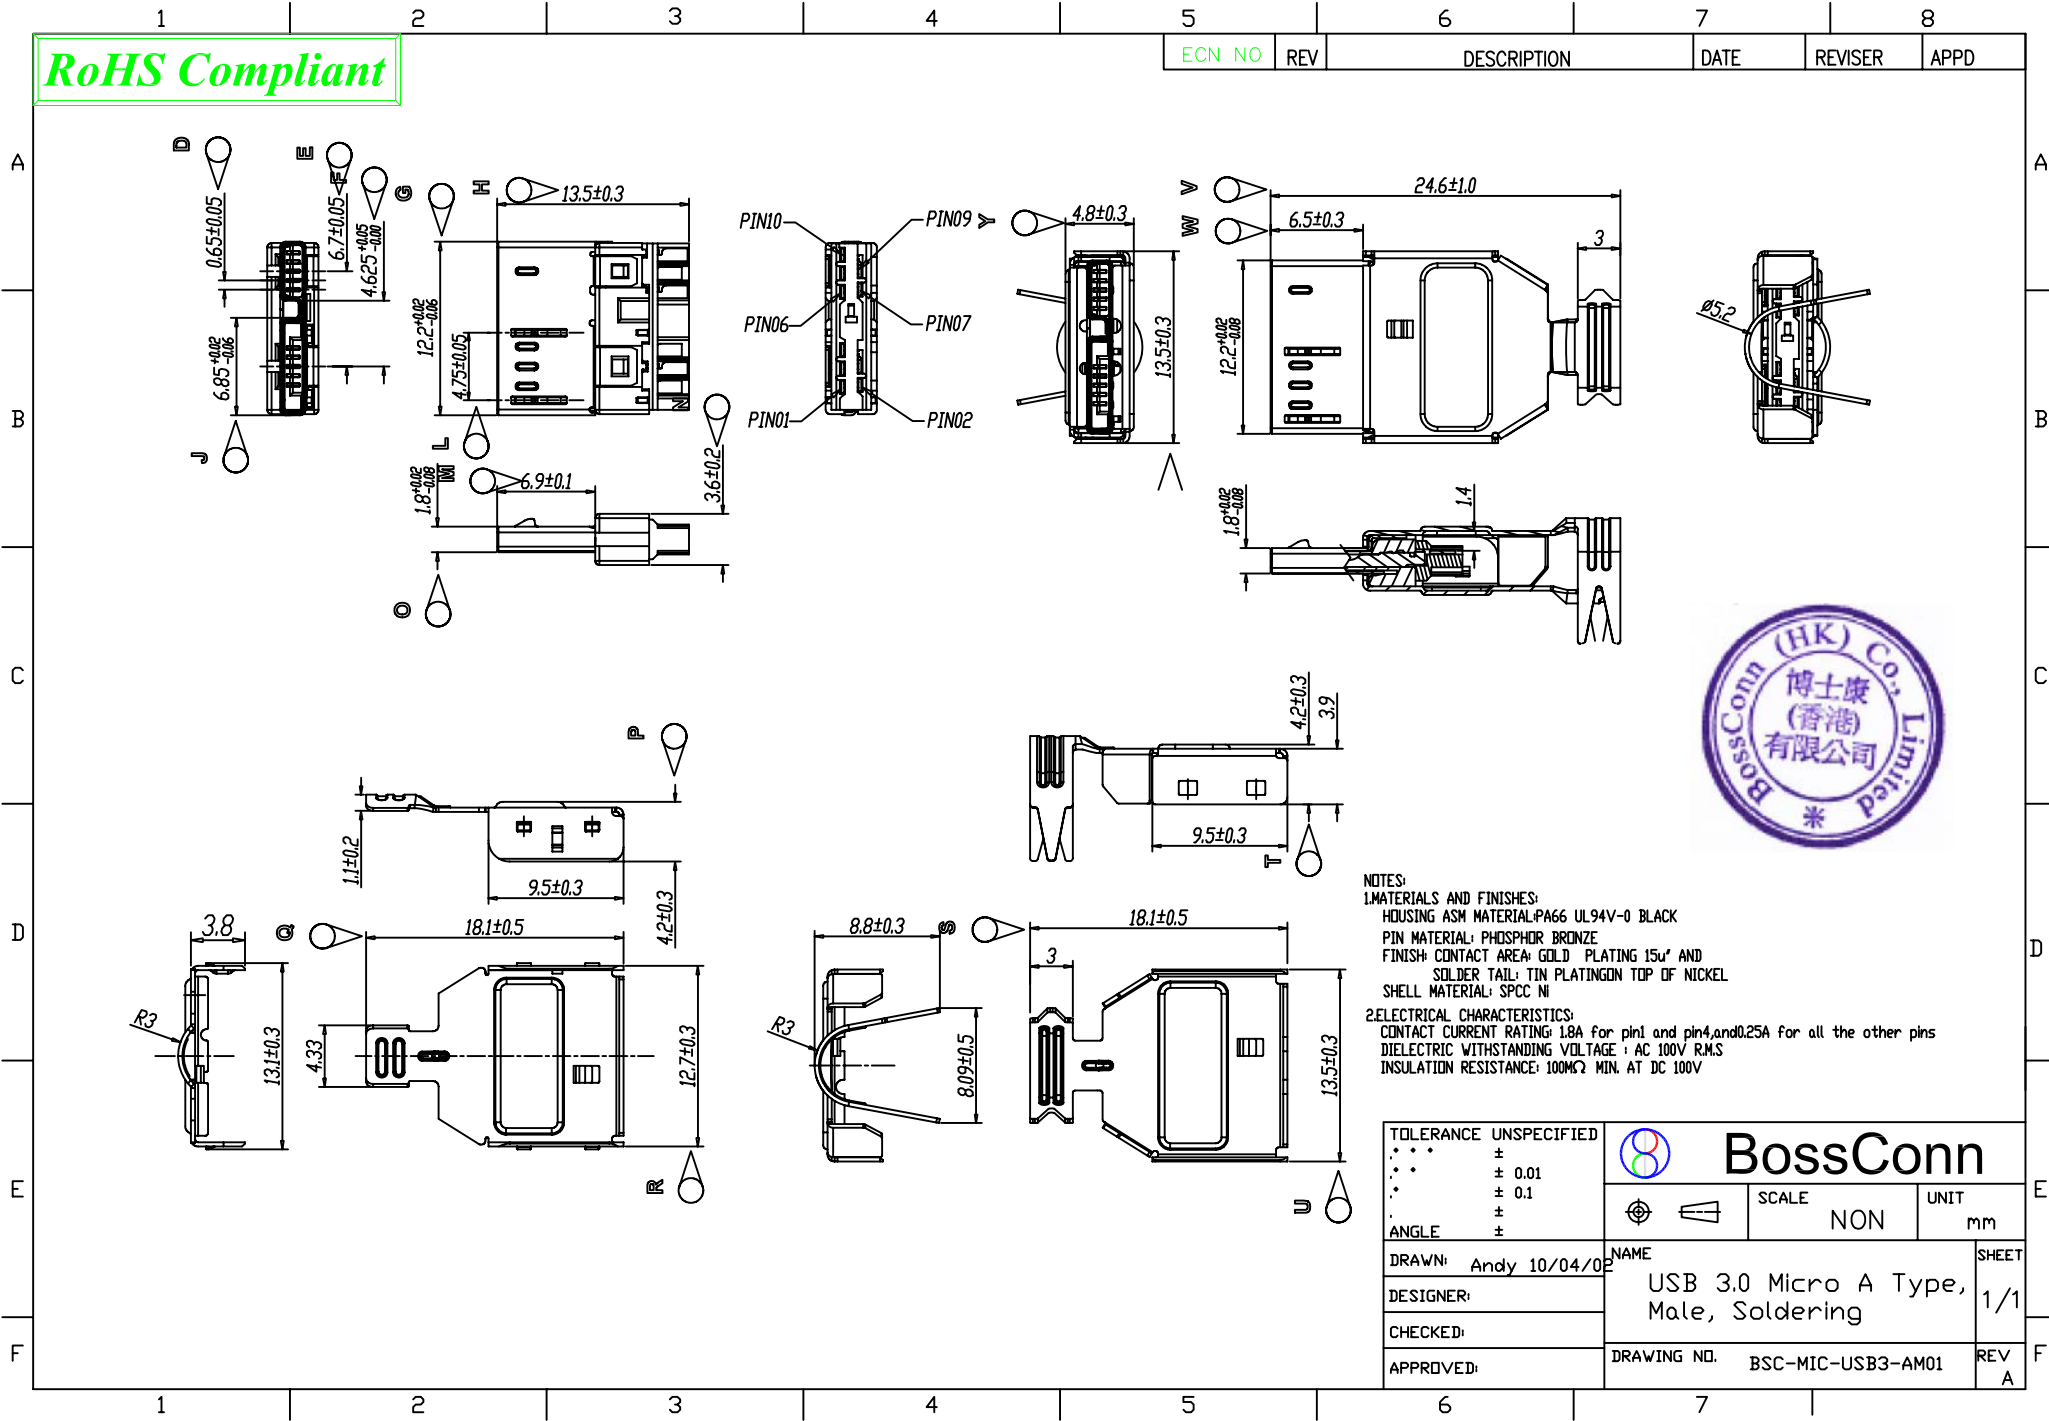

NOTES:
 1. MATERIALS AND FINISHES:
 HOUSING ASM MATERIAL: PA66 UL94V-0 BLACK
 PIN MATERIAL: PHOSPHOR BRONZE
 FINISH: CONTACT AREA: GOLD PLATING 15u" AND
 SOLDER TAIL: TIN PLATING ON TOP OF NICKEL
 SHELL MATERIAL: SPCC NI
 2. ELECTRICAL CHARACTERISTICS:
 CONTACT CURRENT RATING: 1.8A for pin1 and pin4, and 0.25A for all the other pins
 DIELECTRIC WITHSTANDING VOLTAGE: AC 100V R.M.S
 INSULATION RESISTANCE: 100MΩ MIN. AT DC 100V

TOLERANCE UNSPECIFIED . . . ± . . . ± 0.01 . . . ± 0.1 . . . ± . . . ± ANGLE ±	BossConn		SCALE NON	UNIT mm
	DRAWN: Andy 10/04/02 DESIGNER: CHECKED: APPROVED:	NAME USB 3.0 Micro A Type, Male, Soldering		SHEET 1/1 REV A
DRAWING NO.		BSC-MIC-USB3-AM01		REV A