

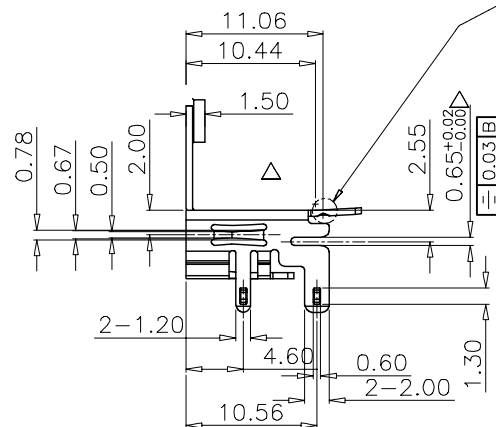


REV.	ZONE	DESCRIPTION	DESIGN	DATE
B		NEW	James	/-

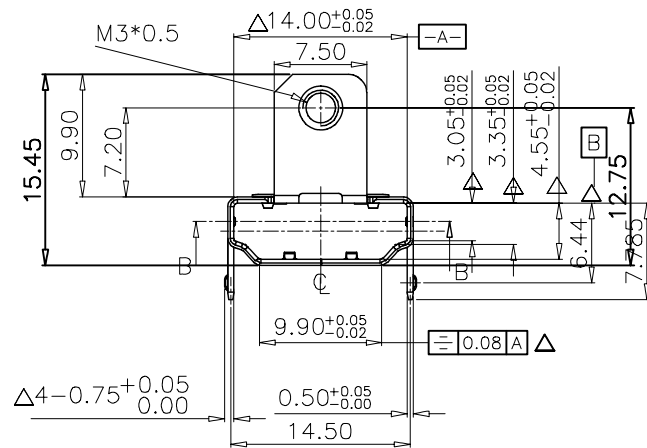

1. MATERIAL:

- 1). HOUSING MATERIAL: THERMOPLASTIC UL94V-0; COLOR: BLACK
2). CONTACT MATERIAL: COPPER ALLOY
3). SHELL MATERIAL: STAINLESS STEEL

1). CONTACT FINISH: 50u" MIN. NICKEL UNDER PLATED, PLATED 3u" Au

CONTACT AREA : PLATED GOLD FLASH ON SOLDER AREA.

3. ELECTRICAL SPECIFICATIONS:

- 1). VOLTAGE RATING: 12 VAC
- 2). CURRENT: 1 AMPERES MAX. PER CONTACT
- 3). OPERATION TEMPERATURE RANGE: -25°C ~ +70°C
- 4). CONTACT RESISTANCE: 60M MAX.
- 5). INSULATION RESISTANCE: 1000M MIN.
- 6). DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR 1 MINUTE
- 7). MAX. PROCESSING TEMP: 260°C for 30 SECONDS
- 8) TRAY/100PCS



 RoHS Compliant		 BossConn							
Unless otherwise specified tolerances are		DRAW NO.	DATE	DRAW NAME: HDMI 母座 四脚插板 带耳					
		DWN	James					/-	
X.	±0.25	CHK		P/N : HAD-SMTFL-C001					
X.X	±0.10	APVD							
X.XX	±0.10								
X.XXX	±0.10	 Third Angle Project		FINISH	MATERIAL	UNIT	SCALE	REV	SHEET
X*	±2.0*			SEE NOTES		mm	1:1	B	1 OF 2
X.X*	±1.0*								